


► Features & Applications

- Used to detect and suppress the accumulated foam inside digestion tanks.
- Widely used in digester tanks of wastewater treatment and solid waste plants.
- Compact, portable and easy to install with no infrastructure requirement.
- Fully customizable according to customer needs.
- Accessory options.
- Semi or fully automatic.

Model	FT60	FT100	FT200	FT350	FT500	FT1000
Specification						
Flowrate Nm ³ /h	max. 60	60-100	100-200	200-400	400-750	750-1200
Diameter, mm	200	250	300	480	640	955
Height, mm	400	600	800	1000	1200	1400
Connections, DN	50	65	80	125	200	250

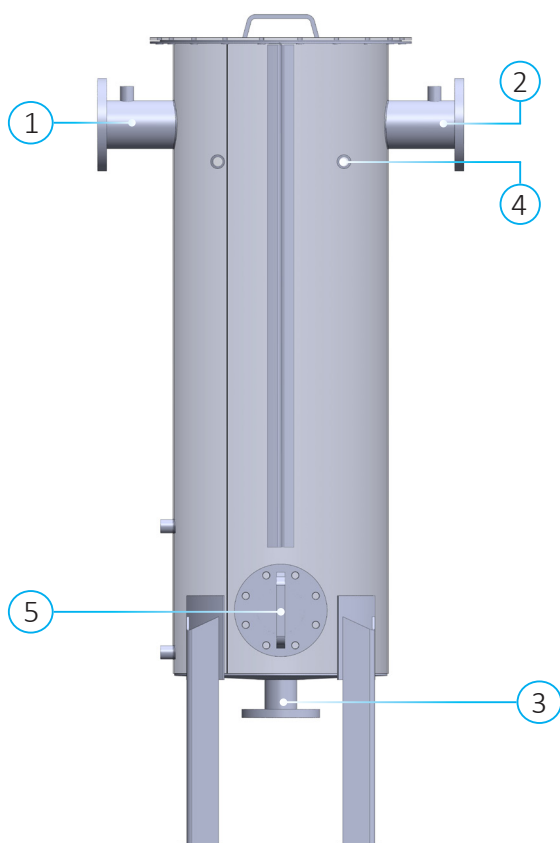

	Components	Materials
1	Gas Inlet	Stainless Steel Grades
2	Gas Outlet	Stainless Steel Grades
3	Water Drain	Stainless Steel Grades
4	Spray Wash System	Stainless Steel Grades
5	Sight Glass	